
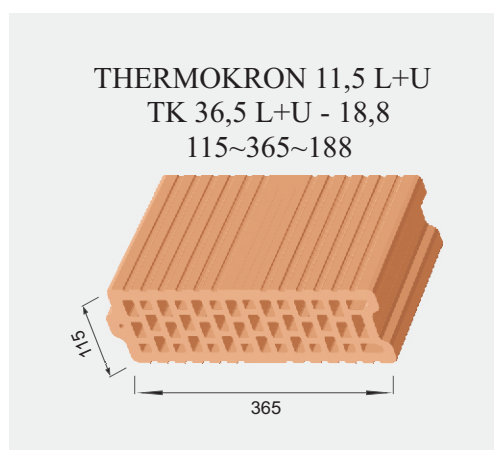
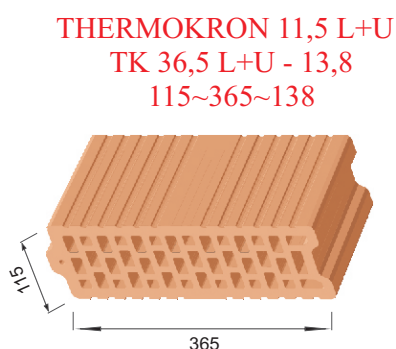
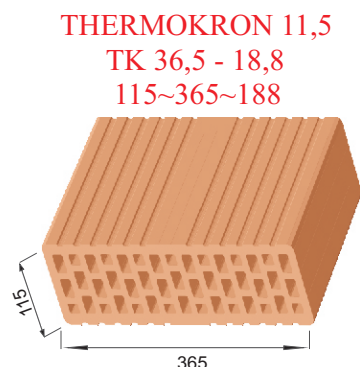


PERETE INTERIOR (DE COMPARTIMENTARE)



		PRODUS					
		THERMOKRON 36,5 TK 11,5- 13,8	THERMOKRON 36,5 TK 11,5- 18,8	THERMOKRON 36,5 L+U TK 11,5L+U - 13,8	THERMOKRON 36,5 L+U TK 11,5L+U - 18,8		
Crt.	DENUMIRE CARACTERISTICA	UM	valoare	valoare	valoare	valoare	
1	Dimensiuni -lungime L	mm	365	365	365	365	
	-latime l	mm	115	115	115	115	
	-inaltime H	mm	138	188	138	188	
2	Masa medie	Kg	6,73	8,82	9,12	6,57	8,96
3	Absorbție apa	%	8-20	8-20	8-20	8-20	
4	Densitate aparenta	Kg/m ³	980	980	980	980	
5	Volum net	dm ³	3,53-3,64	4,82-4,97	3,59-3,71	4,9-5,05	
6	Procent goluri	%	35,8-37	35,8-37	34,8-36	35,8-37	
7	Rezist. la compresiune pe verticala	N/mm ²	min. 10,0	min. 10,0	min. 10,0	min. 10,0	
8	Rezist. la compresiune pe orizontala	N/mm ²	min. 2,0	min. 2,0	min. 2,0	min. 2,0	
9	Rezist. la inghet-dezghet	Clasa	F 1	F 1	F 1	F 1	
10	Saruri solubile active (SO)	%	0,17	0,17	0,17	0,17	
11	Permeabilitatea la vapori de apa μ		5/10	5/10	5/10	5/10	
12	Conductivitate termica echiv. λ_{echiv}	W/m ² K	0,33	0,33	0,33	0,33	
13	Rezistenta termica R	m ² °K/w	0,35	0,35	0,35	0,35	
14	Reactia la foc (% Euroclasa)	%	1,0 A1	1,0 A1	1,0 A1	1,0 A1	
15	Rezist. medie initiala la forfecare- f_{vo}	N/mm ²	0,25	0,25	0,25	0,25	
16	Nr. buc /m ³ de zidarie tencuita	buc.	142	107	146	110	

Valoare pentru produsul fabricat de S.C. MURESENI S.A.

Valoare pentru produsul fabricat de S.C. SASTUC S.A.