



## PERETE EXTERIOR PORTANT - zid 29 cm

Crt.	DENUMIRE CARACTERISTICA	UM	PRODUS	
			THERMOKRON 29 TK 24-13,8	THERMOKRON 29 TK 14-13,8
			valoare	valoare
1	Dimensiuni -lungime	mm	240	140
	-latime	mm	<b>290</b>	<b>290</b>
	-inaltime	mm	138	138
2	Masa medie	Kg	10,4	9,5
3	Absorbție apa	%	8-20	8-20
4	Densitate aparenta	Kg/m <sup>3</sup>	1100	1300
5	Volum net	dm <sup>3</sup>	5,73-5,78	5,62-5,73
6	Procent goluri	%	38,2-40	37-38,5
7	Rezist. la compresiune pe verticala	N/mm <sup>2</sup>	min. 10,0	min. 10,0
8	Rezist. la compresiune pe orizontala	N/mm <sup>2</sup>	min. 2,0	min. 2,0
9	Rezist. la inghet-dezghet	Clasa	F 1	F 1
10	Saruri solubile active (SO)	%	0,17	0,17
11	Permeabilitatea la vapori de apa $\mu$		5/10	5/10
12	Conductivitate termica echiv. $\lambda_{echiv}$	W/m <sup>2</sup> K	0,36	0,40
13	Rezistenta termica R	m <sup>2</sup> °K/w	0,81	0,73
14	Reactia la foc (% Euroclasa)	%	1,0 A1	1,0 A1
15	Rezist. medie initiala la forfecare- $f_{vo}$	N/mm <sup>2</sup>	0,27	0,42
16	Nr. buc /m <sup>3</sup> de zidarie tencuita	buc.	89	148



THERMOKRON 29  
TK 24 - 13,8  
290~240~138




THERMOKRON 29  
TK 14 - 13,8  
290~140~138



Valoare pentru produsul fabricat de S.C. MURESENI S.A.  
 Valoare pentru produsul fabricat de S.C. SASTUC S.A.

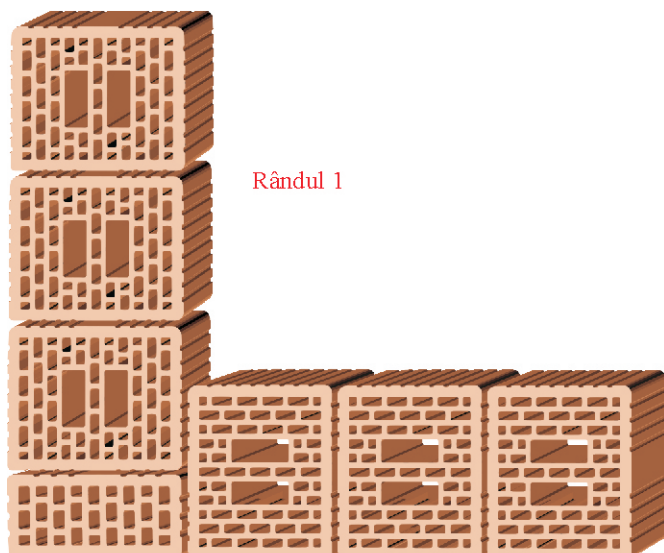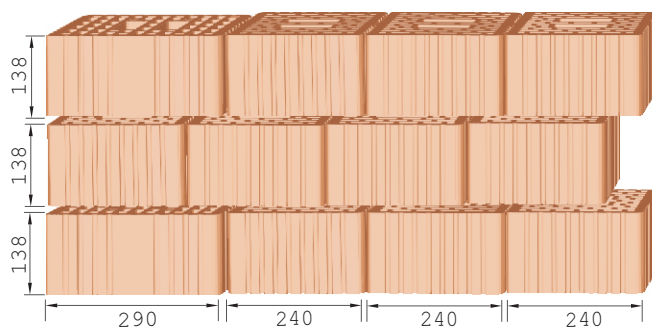

Rândul 1

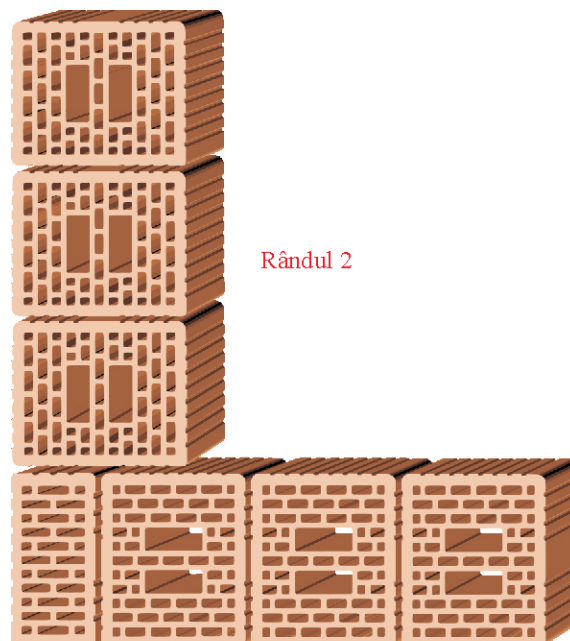

Rândul 2